STEAM-THRU® SERIES CONNECTOR

Steam-Thru Connections allow a quick and easy sterile connection between stainless steel biopharmaceutical processing equipment and disposable bag and tube assemblies. The single-use design saves time and money by eliminating unnecessary cleaning procedures and reducing validation burden associated with reusable components.

FEATURES	BENEFITS
Innovative three-port design	Allows a true steam-through SIP process which eliminates "dead legs" and the need for laminar flow hoods
Patented valve design	Allows sterile connection and disconnection and permits high media flow rate
Thumb latch/removeable sleeve	Secures valve position, provides visual indicator of process stage
3/4" and 1-1/2" Terminations	Easily connects to process equipment
ADCF-free materials	Meet BSE/TSE requirements

Specifications

OPERATING CONDITIONS:

(Fluid Transfer)

Steam Position

Temperature:
39°F to 104°F (4°C to 40°C)

Pressure:
Up to 30 psi, 2.1 bar (Steam-Thru)
Up to 35 psi, 2.4 bar (Steam-Thru II)

Flow Position

Temperature:
39°F to 104°F (4°C to 40°C)

Pressure:
Vacuum to 20 psi, 1.4 bar

STERILIZATION:

Full Connector Assembly (Choose 1)

Gamma: Up to 50 kGy irradiation

Autoclave: Up to 265°F (129°C) for 60 minutes

Steam-In-Place (SIP)
Up to 266°F/130°C (up to ~24psi) for 60 minutes (Steam-Thru)
Up to 275°F/135°C (up to ~31psi) for 60 minutes (Steam-Thru II)

TERMINATION SIZES:

3/8" (9.5mm) to 1/2" (12.7mm) ID hose barb (Steam-Thru)
3/8" (9.5mm) to 1/2" (12.7mm) ID hose barb and 3/4" sanitary (Steam-Thru II)

MATERIALS:

Connection: Polysulfone (amber tint), USP Class VI

O-rings: Silicone (clear), platinum-cured, USP Class VI

Removeable Sleeve: Polycarbonate

***NOTE**: Steam pressures are estimated based upon information in Steam Tables found in literature*

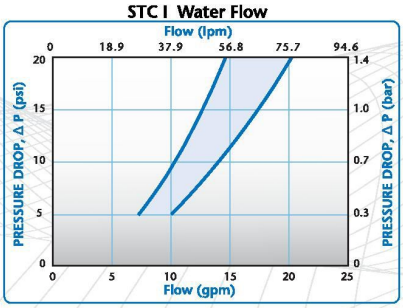

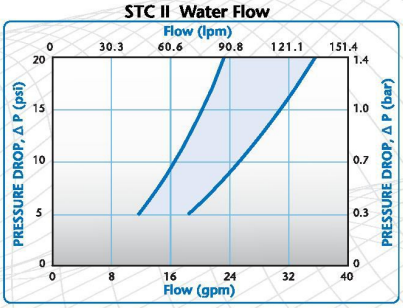

These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of the graph represents the operating range of the product family, i.e. upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.

ASEPTIC GROUP
A GARLOCK HYGIENIC TECHNOLOGIES COMPANY

ASEPTIC GROUP
PARC DU PUY D'OR - 539, Allée des Frênes - 69760 LIMONEST - FRANCE
+33 4 72 52 02 40 sales@aseptic-group.com
www.aseptic-group.com

STEAM-THRU SERIES DIMENSIONS

Steam-Thru® Configurations

Steam-Thru Connection's patented three-port design allows steam to pass directly through the lower ports to "steam on" to stainless equipment. After the SIP cycle is completed, the connector's valve is actuated, creating a sterile flow path to single-use systems.

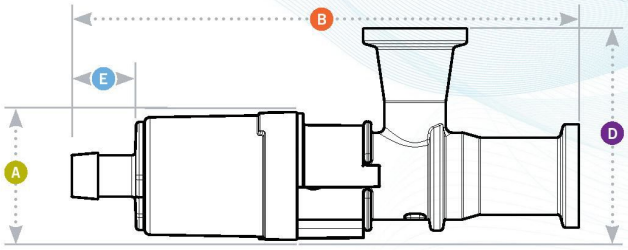

A = Diameter
B = Total Length
C = Actuated Length
D = Height
E = Hose Barb Length

Coupling Bodies • POLYSULFONE

DESCRIPTION	PART NO.	TERMINATIONS	A	B	C	D	E
WITH AUTOCLAVABLE POLYCARBONATE SLEEVE	STC1700000	3/4" x 3/4" sanitary x 1/2" HB	1.20 (30.5)	5.09 (129.3)	4.44 (112.8)	2.00 (50.8)	0.89 (22.6)
	STC1700100	3/4" x 3/4" sanitary x 3/8" HB	1.20 (30.5)	4.80 (121.9)	4.15 (105.4)	2.00 (50.8)	0.60 (15.2)
	STC1700200	3/4" x 1-1/2" sanitary x 1/2" HB	1.20 (30.5)	5.09 (129.3)	4.44 (112.8)	2.00 (50.8)	0.89 (22.6)
	STC1700300	3/4" x 1-1/2" sanitary x 3/8" HB	1.20 (30.5)	4.80 (121.9)	4.15 (105.4)	2.00 (50.8)	0.60 (15.2)

DESCRIPTION	PART NO.	TERMINATIONS	A	B	C	D	E
WITH AUTOCLAVABLE POLYCARBONATE SLEEVE	STC1700500	3/4" x 3/4" sanitary x 1/2" HB	1.20 (30.5)	5.09 (129.3)	4.44 (112.8)	2.00 (50.8)	0.89 (22.6)
	STC1700600	3/4" x 3/4" sanitary x 3/8" HB	1.20 (30.5)	4.80 (121.9)	4.15 (105.4)	2.00 (50.8)	0.60 (15.2)
	STC1700700	3/4" x 1-1/2" sanitary x 1/2" HB	1.20 (30.5)	5.09 (129.3)	4.44 (112.8)	2.00 (50.8)	0.89 (22.6)
	STC1700800	3/4" x 1-1/2" sanitary x 3/8" HB	1.20 (30.5)	4.80 (121.9)	4.15 (105.4)	2.00 (50.8)	0.60 (15.2)

Steam-Thru II Configurations

Steam-Thru II Connections offer the flexibility of "steam on" and "steam off" functionality. The innovative design allows the valve to be returned to the steam position enabling a second SIP cycle following media transfer. The "steam off" disconnection of single-use systems minimizes cross-contamination risks associated with reusable components.

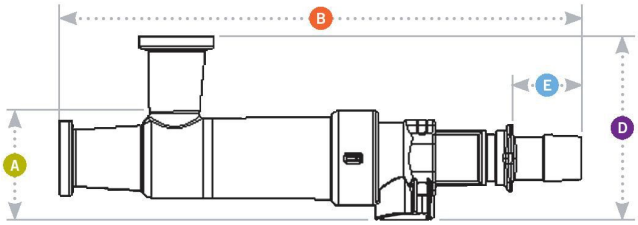

A = Diameter
B = Total Length
C = Actuated Length
D = Height
E = Hose Barb Length

Coupling Bodies • POLYSULFONE

DESCRIPTION	PART NO.	TERMINATIONS	A	B	C	D	E
WITH POLYCARBONATE SLEEVE	STC2020000	3/4" x 3/4" sanitary x 1/2" HB	1.42 (36.1)	6.84 (173.7)	5.93 (150.6)	2.40 (61.0)	.88 (22.4)
	STC2020100	3/4" x 3/4" sanitary x 3/8" HB	1.42 (36.1)	6.76 (171.7)	5.93 (150.6)	2.40 (61.0)	.80 (20.3)
	STC2020200	3/4" x 1-1/2" sanitary x 1/2" HB	1.42 (36.1)	6.84 (173.7)	5.93 (150.6)	2.40 (61.0)	.88 (22.4)
	STC2020300	3/4" x 1-1/2" sanitary x 3/8" HB	1.42 (36.1)	6.76 (171.7)	5.93 (150.6)	2.40 (61.0)	.80 (20.3)
	STC2020900	3/4" x 3/4" sanitary x 3/4" sanitary	1.42 (36.1)	6.60 (167.6)	5.93 (150.6)	2.40 (61.0)	.62 (15.7)
	STC2021000	3/4" x 1-1/2" sanitary x 3/4" sanitary	1.42 (36.1)	6.60 (167.6)	5.93 (150.6)	2.40 (61.0)	.62 (15.7)

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters.

ASEPTIC GROUP
A GARLOCK HYGIENIC TECHNOLOGIES COMPANY

ASEPTIC GROUP
PARC DU PUY D'OR - 539, Allée des Frênes - 69760 LIMONEST - FRANCE
+33 4 72 52 02 40 sales@aseptic-group.com
www.aseptic-group.com